

WFE30-50C

3,000 – 5,000 Lb.


Electric 48 Volt

Cushion Tire

Specifications & Features



Authorized Distributor



Model		WFE30C	WFE35C	WFE40C	WFE50C
Capacity	Lb	3000	3500	4000	5000
Load Center	Inch	24	24	24	24
Power	Electric	48V	48V	48V	48V
Tires Cushion	Front Rear	18x6x12 1/8 14x4 1/2 x 8	18x6x12 1/8 14x4 1/2 x 8	21x7x15 16 1/4 x 5 x11 1/4	21x7x15 16 1/4 x5x11 1/4
Fork Size - Std	Inch	42	42	42	42
Tilt Fwd/Back	Deg	6 / 6	6 / 6	6 / 6	6 / 6
Total Width	Inch	38	38	41.9	41.9
Mast Height	Inch	83	83	83	83
Guard Height	Inch	86.6	86.6	87.4	87.4
Out Turn Radius	Inch	65.3	66.9	72.4	75.2
Right Angle Stack	Inch	80.1 + LL	81.7 + LL	96.7 + LL	99.4 + LL
Length less forks	Inch	74.8	76.4	80.9	83.7
Service Weight	Lb	6860	7370	9060	9520
Wheelbase	Inch	46.7	46.7	50.4	50.4
Battery 48 Volt Recommended	model	24-85-15 595ah	24-85-15 595 ah	24-85-17 680ah	24-85-17 680ah
Compartment	size	36x27x24	36x27x24	38x28x24	38x28x24
Drive Motor – DC 48V	Control	Sevcon	Sevcon	Sevcon	Sevcon
Pump Motor	Control	Contactora	Contactora	Contactora	Contactora
Hyd. Tank Cap	US Gallon	6.6	6.6	11	11
Travel Speed	Load mph	6.9	6.6	8.4	8.1
Travel Speed	No load	7.5	7.5	9.0	8.7
Max draw bar pull	lbs	1600	1600	2210	2210
Service Brake	Type	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Park Brake	Type	Mechanical	Mechanical	Mechanical	Mechanical
Clear Mast	in	4.1	4.1	4.1	4.1
Clear Frame	in	3.9	3.9	4.3	4.3
Grade Load / No Load	%	23/20	21/18	13/20	11/18

Features & Benefits

•High visibility design mast with side thrust rollers in the carriage for smoother operation and longer life of the mast components.

•Fully Hydrostatic Power Steering for smoother operation and many fewer parts for lower maintenance costs. This utilizes the largest cylinder and thickest steel for protection of any forklift in its class!

•Large hydraulically actuated Drum & Shoe type brakes for positive braking performance and ease of maintenance. Mechanical lever type parking brake for reliability.

•Control Handles are mounted on the dash for operator convenience and also allows the operator to enter/exit the operator compartment from either side of the machine comfortably.

- Tilt Steering Wheel
- Adjustable Seat
- Seat Belt
- Dual Head Lights
- Front Turn Signals
- Rear Turn Signals
- Brake Lights
- Back-up Lights
- Back-up Alarm
- Welded Overhead Guard
- Hand hold for entry
- Third valve & lever
- Horn
- Hour Meter
- Key switch
- Safety load backrest
- ITA Class II forks & carriage
- Easy access floor boards
- Rubber safety mat
- Meet or exceed all ANSI B56.1 safety standards for powered industrial trucks and Underwriters Laboratories requirements as to fire hazard.



WFE30-50C


Standard Equipment



Optional Equipment

- Two Stage Mast
- Cushion Tires
- DC Motor
- Sevcon 48 Volt
- Headlights
- Back Up Lights
- Turn Signals
- Hydro Steer Axle
- Mirrors
- Load Backrest
- Seat Belt
- Tilt Steer Wheel
- 3rd Valve
- Operator Manual
- Standard Forks

- Various Masts
- Standard
- Full Free Lift
- Triplex
- Side Shifters**
- 4 Way Hydraulics
- Various Forks
- Much More!

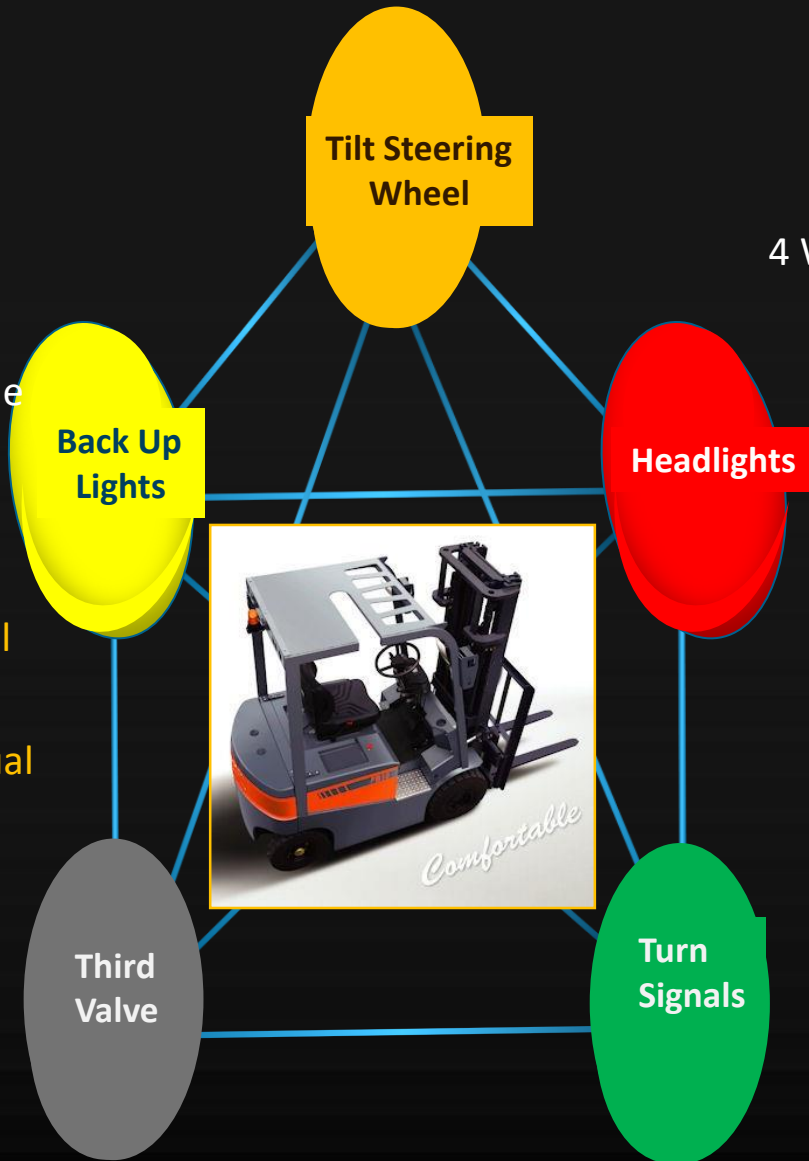

WFE30-WFE50C