

WFET30 – WFET35P

3,000 – 3,500 Lb.

Electric 3 Wheel 48 Volt

Solid Pneumatic Tire

Specifications & Features



WFET30 – WFET35P



Authorized Distributor

Model		WFET30P	WFET35P
Capacity	Lb	3000	3500
Load Center	Inch	24	24
Power – AC SME	Electric	48V	48V
Tires	Front Rear	18x7x8 15x41/2x8	18x7x8 15x41/2x8
Fork Size - Length	Inch	42	42
Mast Tilt Degree	Fwd / back	6 / 12	6 / 12
Total Width	Inch	42.1	42.1
Mast Height	Inch	78.1	78.1
Guard Height	Inch	78	78
Min Turn Radius (out)	Inch	61	61
Right Angle Stack	in	84.3 + LL	84.3 + LL
Max Height	Inch	178	178
Fork Back Height	Inch	48	48
Total Length (less forks)	Inch	74.8	76
Service Weight	Lb	6710	7000
Max drawbar pull	lbs	3080	3080
Wheelbase	Inch	53.1	53.1
Service Brakes	type	Hydraulic	Hydraulic
Parking Brake	type	Mechanical	Mechanical
Hyd .Tank Capacity	Gal	4.8	4.8

Model	3000	3500
Travel Speed Loaded	8.1 mph	8.1 mph
Travel Speed Empty	8.8 mph	8.8 mph
Lift Speed Loaded	63 fpm	59 fpm
Lift Speed Unloaded	92.7 fpm	92.7 fpm
Lower Speed Loaded	106 fpm	106 fpm
Lower Speed Unloaded	92.7 fpm	92.7 fpm
Max Drawbar Pull	3080 lbs	3080 lbs
Drive Motor Control Type	AC	AC
Pump Motor Control	Contactora	Contactora
Max Hydraulic Pressure	2500 psi	2500 psi



Battery Information	WFET30P	WFET35P
Model	24-85-13 / 510 AH / 2188 LBS	24-85-13 / 510 AH / 2188 LBS
Battery Size	38.1 x 20.6 x 22.62	38.1 x 20.6 x 22.62
Compartment	38.5 x 21 x 23 ½	38.5 x 21 x 23 ½
Cover	None	None
Connector	SB350	SB350

Features & Benefits

-High visibility design mast with side thrust rollers in the carriage for smoother operation and longer life of the mast components.

•Fully Hydrostatic Power Steering for smoother operation and many fewer parts for lower maintenance costs. This utilizes the largest cylinder and thickest steel for protection of any forklift in its class!

•Large hydraulically actuated Drum & Shoe type brakes for positive braking performance and ease of maintenance.

•Mechanical lever type parking brake for reliability.

•Control Handles are mounted on the dash for operator convenience and also allows the operator to enter/exit the operator compartment from either side of the machine comfortably.

- Tilt Steering Wheel**
- Adjustable Seat**
- Seat Belt**
- Dual Head Lights**
- Front Turn Signals**
- Rear Turn Signals**
- Brake Lights**
- Back-up Lights**
- Back-up Alarm**
- Welded Overhead Guard**
- Hand hold for entry**
- Third valve & lever**
- Horn**
- Hour Meter**
- Key switch**

- Safety load backrest**
- ITA Class II forks & carriage**
- Easy access floor boards**
- Rubber safety mat**
- Meet or exceed all ANSI B56.1 safety standards for powered industrial trucks and Underwriters Laboratories requirements as to fire hazard.**



WFET30-35P


Standard Equipment



Optional Equipment

- Two Stage Mast
- Solid Pneumatic Tires
- AC Motors
- AC Controller
- SME 48 Volt
- Headlights
- Back Up Lights
- Turn Signals
- Hydro Steer Axle
- Mirrors
- Load Backrest
- Seat Belt
- Tilt Steer Wheel
- 3rd Valve
- Operator Manual
- Standard Forks

- Various Masts
- Standard
- Full Free Lift
- Triplex
- Side Shifters**
- 4 Way Hydraulics
- Various Forks
- Much More!

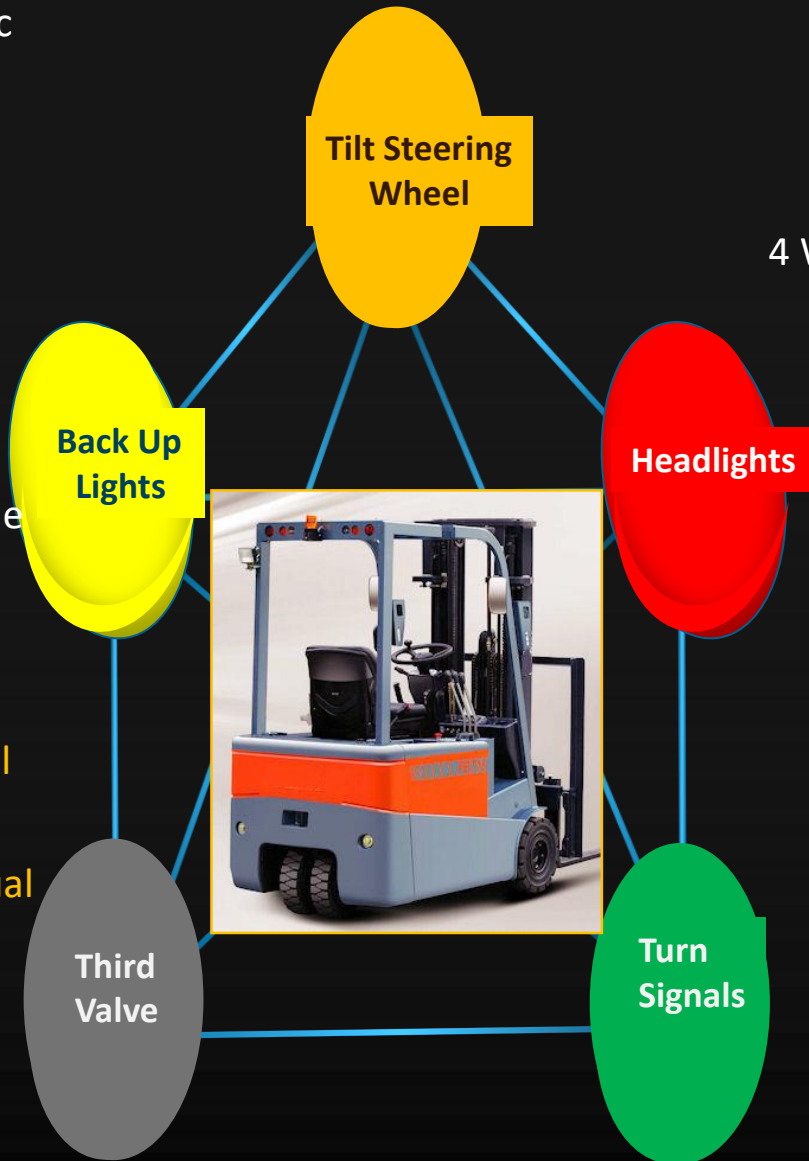

WFET30-35P